

Gavita® CT 2000e 208-480 V

Item #HGC906415



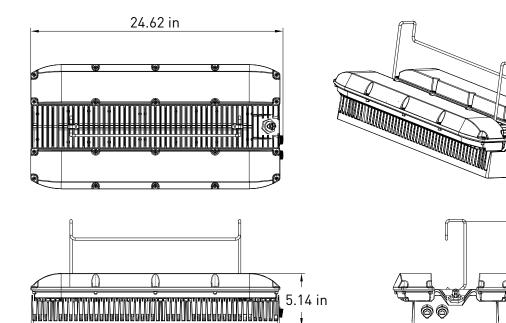



This document is not intended to be used for installation purposes. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

HawthorneGC.com | Canada: HawthorneGC.ca



SPECIFICATIONS



10.17 in

INPUT VOLTAGE: 208-480 V

INPUT WATTS: 650 W

HEAT LOAD: 835.3 btu/hr*

CURRENT: 3.125 A @ 208 V, 2.35 A @ 277V,

1.35 A @ 480V

FREQUENCY: 50/60 Hz

POWER FACTOR (cosø): > 0.90

AMBIENT TEMP: 104° F (0-40° C)

ENVIRONMENTAL RATING: IP65 Indoor

Wet Location

MOUNTING: Wire Hangers and Unistrut Bracker

DIMMING COMMUNICATIONS: 0-10V (EIA-485).

RJ45, Dim of Off. Power Monitoring with the

Gavita EL3 Master Controller**

DIMMING: 35%-100% with Gavita

EL3 Master Controller**

CONTROLLED ENVIRONMENT: Intended for

indoor (non-stacked), greenhouse

LIGHTING SCHEME: Horizontal, Top Light use, Sole

source or supplemental lighting

WEIGHT: 34.5 lb

DIM: 24.6 x 12.1 x 5.1 in 15.6 kg

CERTIFICATIONS:

Conforms to ANSI/CAN/UL STD 8800

Conforms to ANSI/UL STD 1598

Conforms to ANSI/UL STD 8750

Certified to CSA STD C22.2 No. 250.0

Certified to CSA STD C22.2 No. 250.13

WARRANTY: 5 Years***

*Please consult HVAC Expert to calculate total heat load in your grow space. ** Sold Separately

***When purchased from an authorized Hawthorne dealer, this product is covered by a LIMITED WARRANTY, available at hawthornegc.com/warranties. You can also obtain the Terms of Sale and Limited Warranty by calling Hawthorne toll-free at: 1-888-478-6544 or writing Hawthorne at: Hawthorne Hydroponics LLC, 800 Port Washington Blvd. Port Washington, NY 11050, Attn: Customer Service.