

Gavita® CT 2000e 208-480 V






Item #HGC906415



SPECIFICATIONS



INPUT VOLTAGE: 208-480 V	
INPUT WATTS: 650 W	
HEAT LOAD: 2218 btu/hr*	
CURRENT: 3.125 A @ 208 V, 2.35 A @ 277V, 1.35 A @ 480V	
FREQUENCY: 50/60 Hz	
POWER FACTOR (cosφ): > 0.90	
AMBIENT TEMP: 104° F (0-40° C)	
ENVIRONMENTAL RATING: IP65 Indoor Wet Location	
MOUNTING: Wire Hangers and Unistrut Bracker	
DIMMING COMMUNICATIONS: 0-10V (EIA-485), RJ45, Dim of Off. Power Monitoring with the Gavita EL3 Master Controller**	
DIMMING: 35%-100% with Gavita EL3 Master Controller**	
CONTROLLED ENVIRONMENT: Intended for indoor (non-stacked), greenhouse	
LIGHTING SCHEME: Horizontal, Top Light use, Sole source or supplemental lighting	
WEIGHT: 34.5 lb 15.6 kg	DIM: 24.6 x 12.1 x 5.3 in
CERTIFICATIONS: Conforms to ANSI/CAN/UL STD 8800 Conforms to ANSI/UL STD 1598 Conforms to ANSI/UL STD 8750 Certified to CSA STD C22.2 No. 250.0 Certified to CSA STD C22.2 No. 250.13	
WARRANTY: 5 Years***	

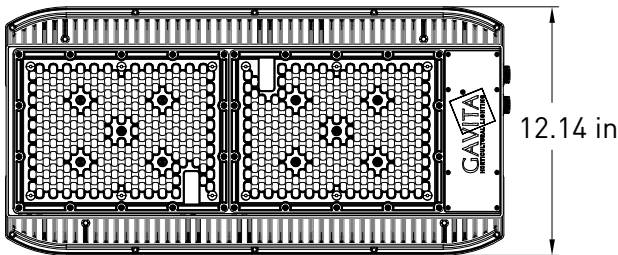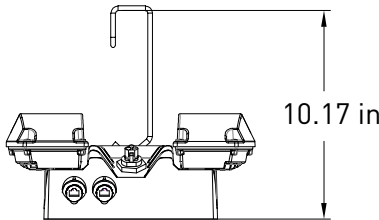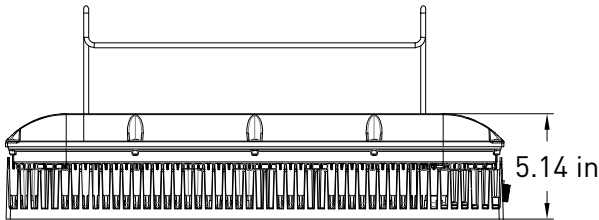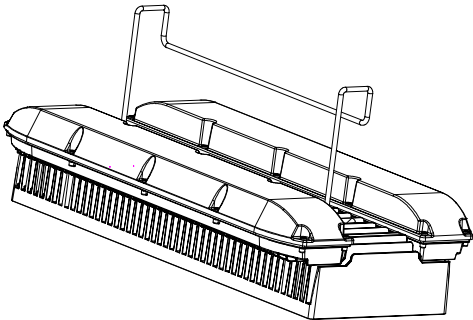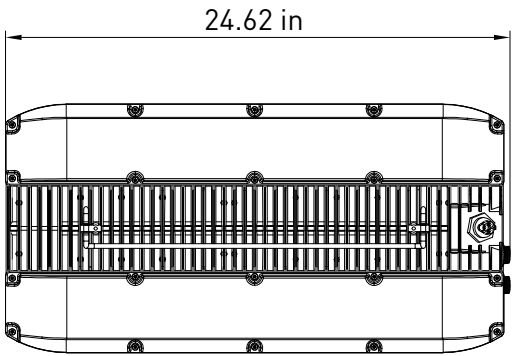

This document is not intended to be used for installation purposes.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.

HawthorneGC.com | Canada: HawthorneGC.ca

*Please consult HVAC Expert to calculate total heat load in your grow space.

** Sold Separately

***When purchased from an authorized Hawthorne dealer, this product is covered by a LIMITED WARRANTY, available at hawthornegc.com/warranties. You can also obtain the Terms of Sale and Limited Warranty by calling Hawthorne toll-free at: 1-888-478-6544 or writing Hawthorne at: Hawthorne Hydroponics LLC, 2300 Chabot Ct. Tracy, CA 95304, Attn: Customer Service.

HGC906415 Gavita® CT 2000e LED 208-480 V Spec-Sheet- Last Updated 251010aSD