


Gavita® Under Canopy 150W LED

Item #HGC907092



SPECIFICATIONS

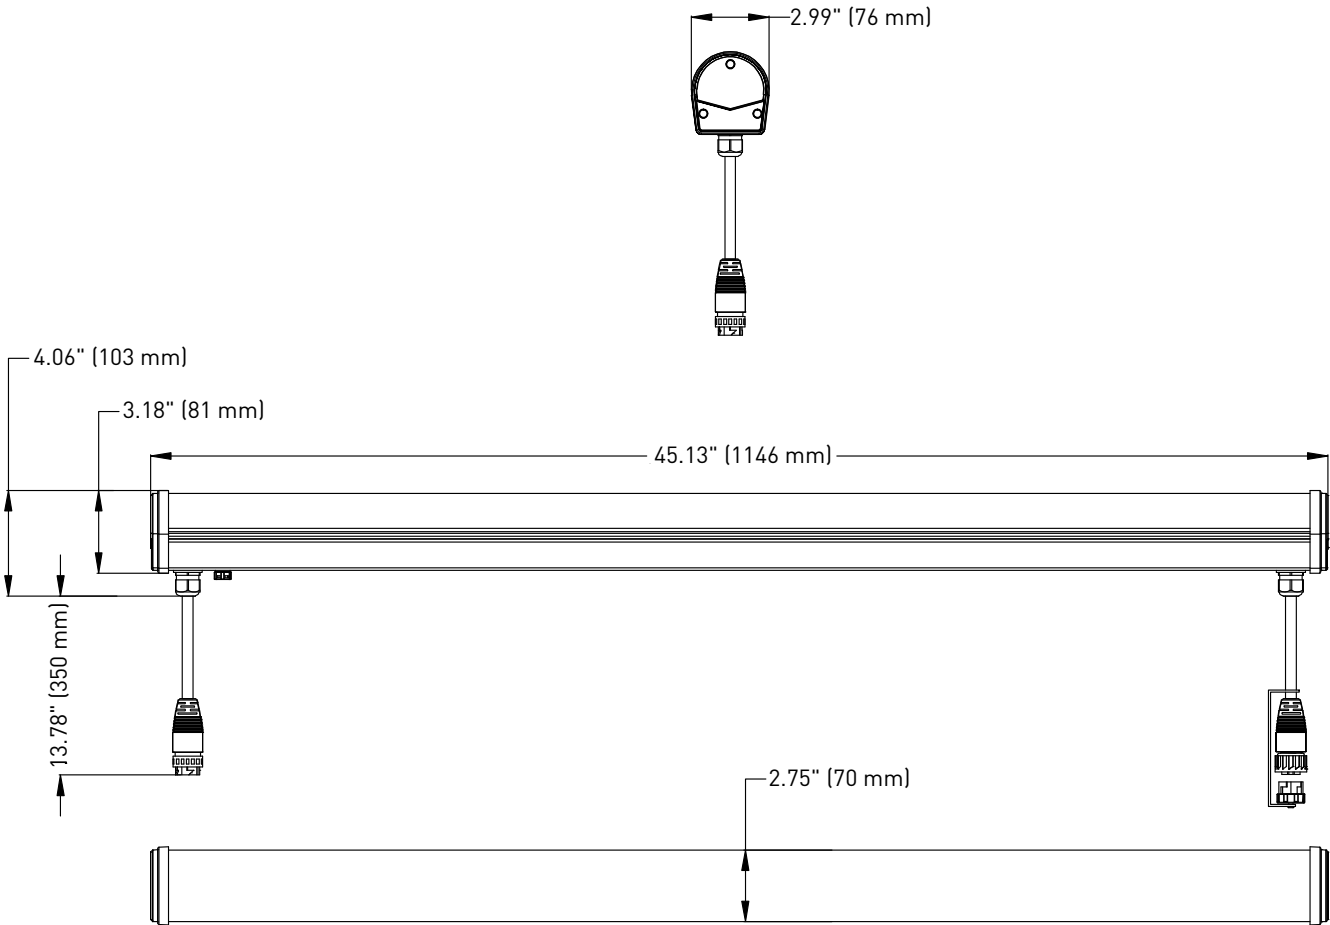

INPUT VOLTAGE: 120-277 V	
INPUT POWER: 150 W	
CURRENT - 100%	
120 V	1.31 A
208 V	0.74 A
240 V	0.64 A
277 V	0.57 A
LIGHT DISTRIBUTION: 155°	
FREQUENCY: 50/60 Hz	
POWER FACTOR (cosφ): > 0.90	
MAX AMBIENT TEMP: 104° F (40° C)	
ENVIRONMENTAL RATING: IP66*, suitable for wet locations	
MOUNTING: Telescoping Mounts (2x)	
DIMMING COMMUNICATIONS: 0-10V IEC60929 Annex E, RJ12, Dim to Off	
DIMMING: 10% - 100% with 0-10V Controller	
CONTROLLED ENVIRONMENT: Intended for indoor (non-stacked), indoor (stacked), greenhouse	
LIGHTING SCHEME: Horizontal, Top light, intra-canopy use, Sole source or supplemental lighting	
WEIGHT: 2.9 kg / 6.39 lb	DIM: 45.12 x 2.99 x 3.19 in
CERTIFICATIONS: Conforms to ANSI/UL STD 1598. Conforms to ANSI/CAN/UL STD 8800 ETLus Listed	
WARRANTY: 5 year warranty**	

*self declared IP rating
**When purchased from an authorized Hawthorne dealer, this product is covered by a LIMITED WARRANTY, available at hawthornegc.com/warranties. You can also obtain the Terms of Sale and Limited Warranty by calling Hawthorne toll-free at: 1-888-478-6544 or writing Hawthorne at: Hawthorne Hydroponics LLC, 2300 Chabot Ct. Tracy, CA 95304, Attn: Customer Service.

HGC907092 Gavita® Under Canopy 150W LED Spec-Sheet- Last Updated 250708USD